


# REXCON LOGO 12 TRANSIT MIX **CONCRETE BATCH PLANT**



# RexCon LoGo 12 Transit Mix

Portable when you need it, durable enough to last a lifetime. The rugged base trailer and solid structures makes the LoGo 12 ideal for any permanent ready mix operation requiring 180 to 200 cubic yards per hour.



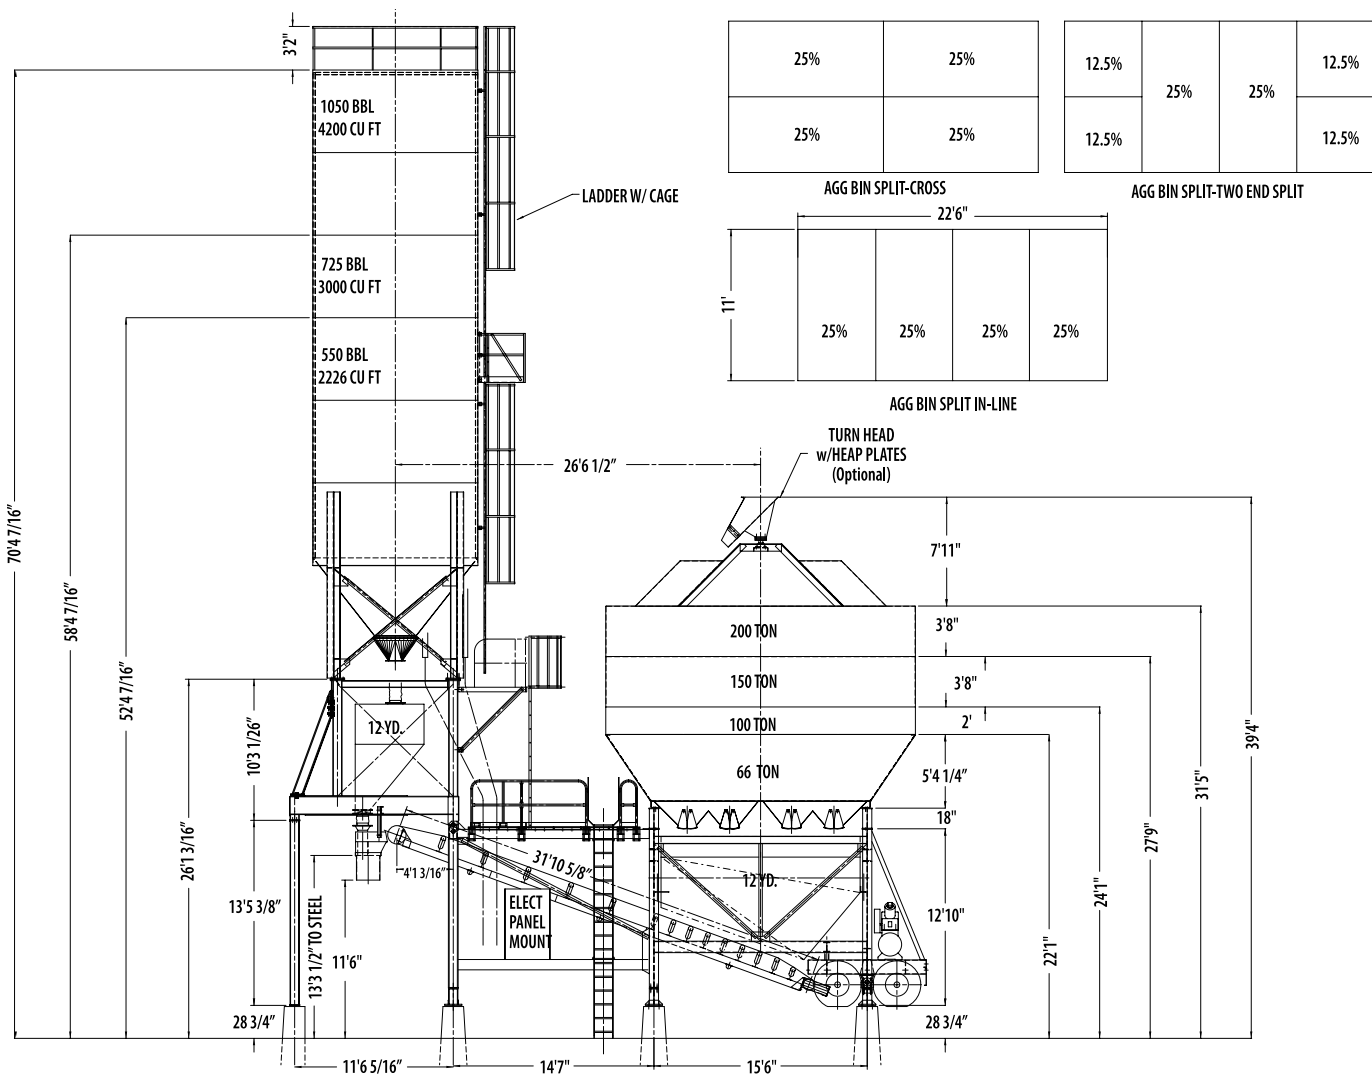

## FEATURES

- Gravity feed cement storage and batching. No screw conveyors mean reduced maintenance with faster, more accurate batching.
- Flexible design and stout structure provide available storage capacities to match your production requirements.
- Split compartment main cement silo with 100 to 200 Ton capacity.
- Four compartment fold-down bolted standard aggregate bin maintains portability or factory welded for ease of installation in stationary applications.

## SPECIFICATIONS

**Aggregate Bins:** 45 cu.yd. / 66 ton (CPMB), 4 compartments (in-line or cross configuration).

**Aggregate Batcher:** 12 cu.yd. / 9 cu.m. (CPMB), with 50,000 lb. load cells.

**Gravity Cement storage:** 4200 cu. ft./1050 bbl (CPMB) split compartment

**Cement Batcher:** 12 cu. yd./9 cu. m. (CPMB), with 10,000 lb. load cells.

**Batch Belt:** 30" wide, 350 fpm, with 20 HP drive.

**Water:** 3" Mag Meter with electric cut-off valve.

**Air:** 15 HP two-stage compressor with 120 gallon tank. 4.6 HP Aeration blower.

**Power panel:** 460 volt power panel (includes starters for all supplied motors, with auto resets and 110 volt transformer).

**Transportation:** Dual Axle with 8 wheels, brakes, stop lights, king pin and connectors.

*Specifications are subject to change without notice.*

## OPTIONS

**Aggregate bins:** 76 cu.yd./100 ton, 115 cu.yd./150 ton, or 153 cu.yd./200 ton capacity. 6-compartments available.

**Gravity cement storage:** 2200 cu. ft./550 bbl., or 4200 cu.ft./1050 bbl., single or split compartment

**Auxiliary cement storage:** 550 bbl., 725 bbl., or 1050 bbl., single or split compartment (available with structures, maintenance platform, and screw conveyor). Anti-overfill pinch valve systems

**Batch belt:** 36" wide, 350 fpm, with 25 HP drive

**Provisions for future conversion to central mix operations.**

**Material Handling:** Turnhead with fixed conveyor or radial stacking conveyor.

## ADDITIONAL OPTIONS

- AR steel or polyurethane liners for aggregate bins and batcher.
- High and low cement and aggregate signals.
- Roof top collectors, batcher vent, and central dust collection.
- RexCon batch automation controls with office container.
- Three sided aggregate bin bottom maintenance platform.



**ASTEC™**

[www.astecindustries.com](http://www.astecindustries.com)