


RMS SERIES

Mobile Scaler

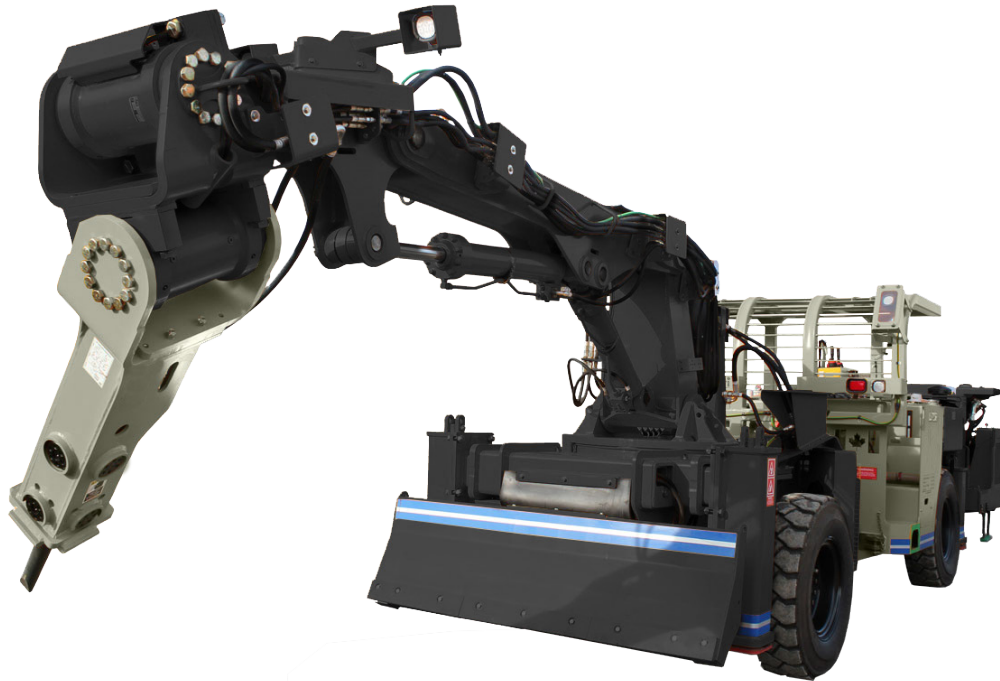

Maximum Coverage

The RMS series scaler offers coverage in a 3.5-6.2 meter heading using a six-axis, slew-bearing boom with 180-degrees of boom swing to scale the mine heading's face, back and both side walls from a single position

Good Visibility for Tramming and Breaking

Located mid-ship, the operator's cab provides great visibility and safety while moving through an underground mine and during scaling operation

Fast Set-Up Times and Stable Operation

Offers four heavy-duty tube-in-tube self-leveling stabilizers to ensure your crew is working safely without compromising time. The stabilizers also eliminate the oscillation of the engine end axle for excellent machine stability during boom and breaker operation

Physical/Operating Characteristics

Model	Operating Weight		Overall Width		Tramming Length		Tramming Height		Boom Swing
	lb	kg	in	m	ft	m	ft	m	deg
RMS18	45,365	20,700	7	2.1	31	10.3	8.5	2.6	+/-90°