



REXCON® REXBATCH

150

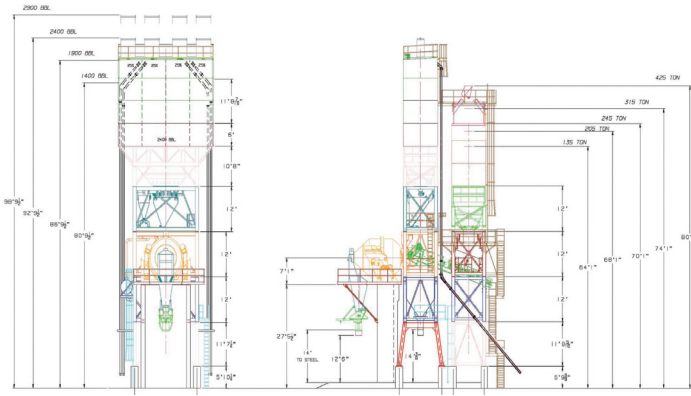

WITH HOLDING HOPPER

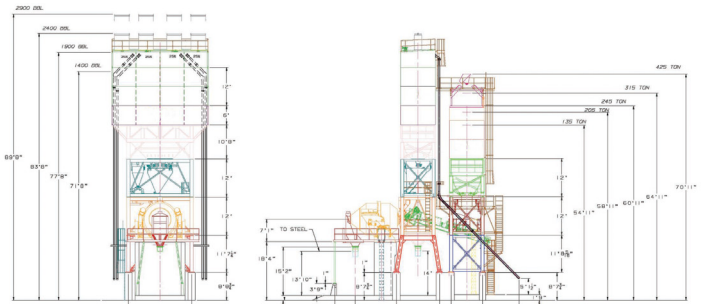

WITHOUT HOLDING HOPPER

REXBATCH WET/DRY FEATURES

AGGREGATE BIN

- 135 to 425 ton capacity
- Four (4) to eight (8) compartments
- Turnhead with controls
- Clamshell gates with air cylinders
- Gear segmented

AGGREGATE BATCHER

- 12 yd³ capacity with load cells
- Heavy duty clamshell gates with air cylinders

CEMENT BIN

- 1,000 to 2,900 bbl (187 to 545 ton) capacity
- Two (2) to six (6) compartments
- 5" diameter fill pipes
- Butterfly gates with air cylinders
- Aeration pads

CEMENT BATCHER

- 12 yd³ capacity
- Low Pressure diffuser pads
- Butterfly gates with air cylinders

BATCHING BELT CONVEYOR

- 48" wide with motor and reducer sized for 600 FPM
- Vulcanized belt splice with scraper

WATER SYSTEM

- 3" water meter
- Batched water holding reservoir piped to discharge point

WET/DRY OPERATION

- Hydraulically operated flop gate

POWER PANEL

- NEMA enclosure with lockable main disconnect switch
- Motor starters for all electric motors

CONTROLS

- Rexcon's RC3 batch Automation Controls with optional batch office customized to fit your company's needs

REXBATCH OPTIONS

- Custom engineering services designed to site space requirements and limitations
- Custom material handling systems
- Central or individual dust control systems
- Customized work platforms and ladder access with safety in mind
- High and low level signals
- Pinch valves
- Holding hopper for increased production
- AR 400 or polyurethane on aggregate bins and batchers
- Many other production enhancing options available

